




FAX:
e-mail:
website:

(902)542-7479
info@britcycle.com
www.britcycle.com

604 DAVISON STREET, RR3 WOLFVILLE, NOVA SCOTIA, B4P 2R3, CANADA (902)542-7478
& 146 PORTER STREET, HACKENSACK, NEW JERSEY, 07601, USA (201)880-0366

Mounting Instructions for 71-1168/A Triumph T160, T150 and BSA A75 Rocker Feed

- 1) The most accurate way to fit this kit is to mount when both rocker boxes are being re-assembled to the head. This ensures that the rocker shafts are centered with the bores of the unit. However in 75% of the bikes tested, the feeder will bolt to the fixed rockers with no problem.
- 2) Use new copper washers 0.030 - 0.045" thick.
- 3) 75% of the bikes tested had no clearance problem. However in some installations, it may be necessary to use a dremel tool to remove a portion of the fins indicated in the picture so that the feeder sits squarely against the surfaces of the rocker boxes. Grind back fins A,B,C and D. C and D need only be relieved to the center of the rocker spindle.

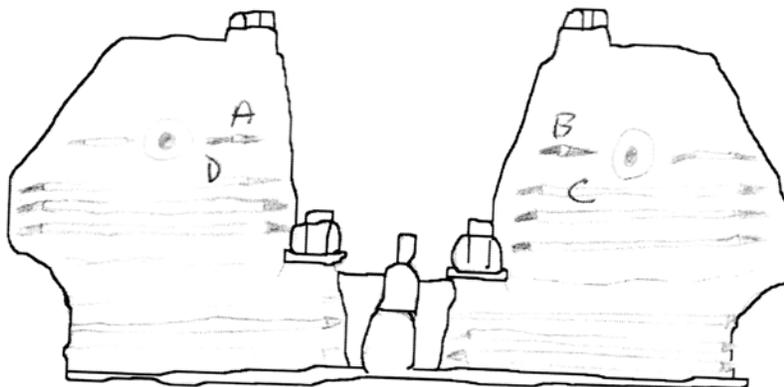

IMPORTERS AND DISTRIBUTORS OF PARTS AND ACCESSORIES
FOR CLASSIC TRIUMPH, BSA AND NORTON MOTORCYCLES
HELPING TO KEEP BRITISH MOTORCYCLES ON THE ROAD SINCE 1977!
